
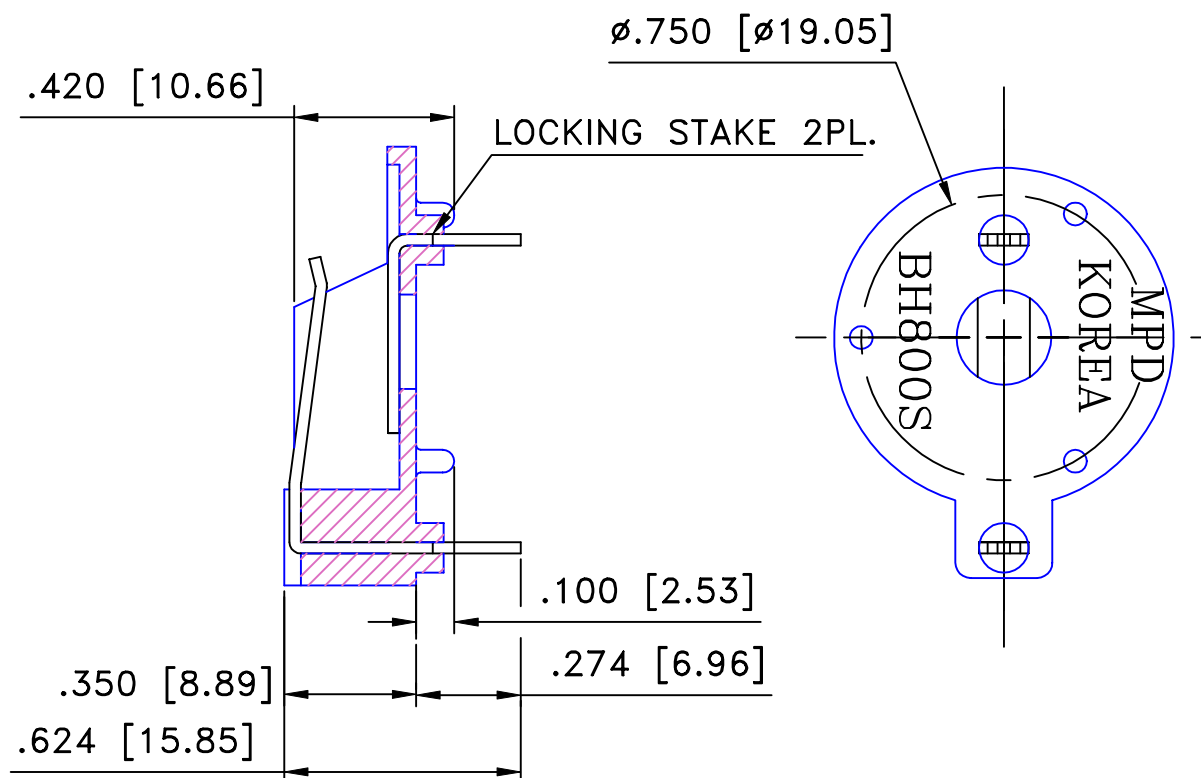
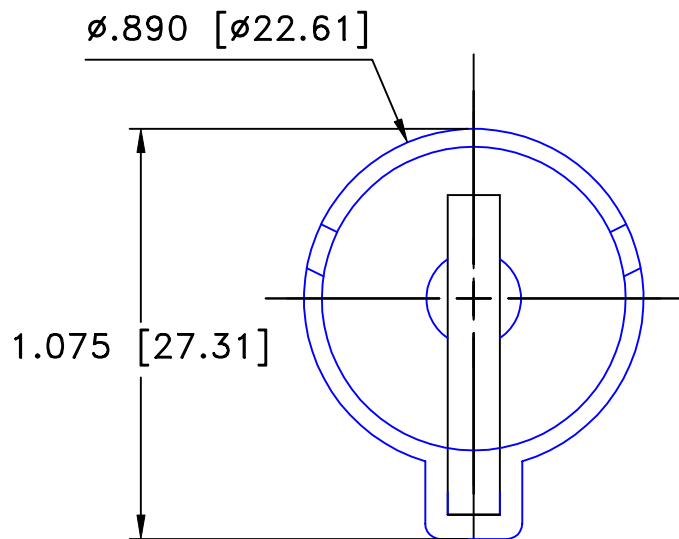


## PCB LATOUT

| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|------|-----|-----------------|------|-----|-----|
|      |     |                 |      |     |     |
|      |     |                 |      |     |     |

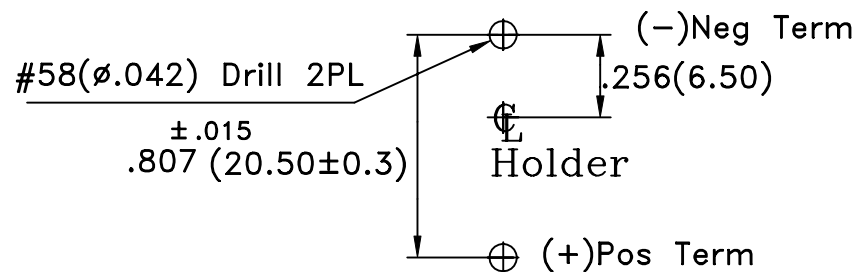

## SPECIFICATIONS

- \*Holder material—thermoplastic, black PBT
- \*Flammability rating—UL94V-0, File No.88499(M)
- \*Contacts—302 spring temper stainless steel nickel plated overall
- \*Dielectric strenth—560volts/mil at 25°C for 5seconds
- \*Temperature range— -55° to +180°C
- \*Resistance to solvents—Xylene,ethyl,butyl,methyl&proptl alcohol;ethyl acetate,heptane;toluene;refrigerant

|                                |                                                                                                                                                                            |                          |                                   |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|-----------------------------------|
| Tolerance<br>(Except as noted) |  Memory protection Devices, Inc<br>200 Broad Hollow Road, Farmingdale, New York 11735 |                          |                                   |
| decimal<br>$\pm .5$ (.020)     |                                                                                                                                                                            | Scale<br>4=1             | Drawn By T.S.<br>Approved By T.B. |
| Fractional<br>$\pm .8$ (.030)  | Title<br>CR/BR 2025/2032 TWO COIN BATTERY                                                                                                                                  |                          |                                   |
| Angular<br>$\pm 3^\circ$       | Date<br>10/25/00                                                                                                                                                           | Drawing Number<br>BH800S |                                   |