



Drypower


6.4V	6Ah	LiFePO ₄	38.4Wh
------	-----	---------------------	--------


6LFP6

Rechargeable Lithium Iron Phosphate Battery




SPECIFICATIONS

Nominal Voltage	6.4V
Nominal Capacity @5hr Rate	6Ah
Watt-hour	38.4Wh
Weight	0.36kg
Internal Resistance (at 1KHz)	≤50mΩ
Charge @25°C	
Standard Charge Current	1.2A
Maximum Charge Current	5A
Max Charge Voltage	7.3V
Discharge @25°C	
Standard Discharge Current	1.2A
Max. Continuous Discharge	5A
Cut-off Voltage	5.0V
Cell Used	18650-2AH
Assembly	2S3P-Cyl
Cycle Life (±0.5C, 25°C)	
100% DoD	≥1500 cycles
80% DoD	≥2500 cycles
50% DoD	≥4500 cycles
Operating Temperature	
Charge	0°C ~ +45°C
Discharge	-20°C ~ +60°C
Storage	-20°C ~ +45°C
Operating Humidity Range	
Case Material	ABS
Termination	F2 (Faston 250)
Ingress Protection Rating	
Series Connection	Up to 4S
Parallel Connection	No
Barcode	 9319632530740







Any orientation - Drypower Rechargeable Lithium batteries with cylindrical LiFePO₄ cells inside can be used and mounted in any orientation, offering ultimate flexibility in a wide variety of applications.

DIMENSIONS

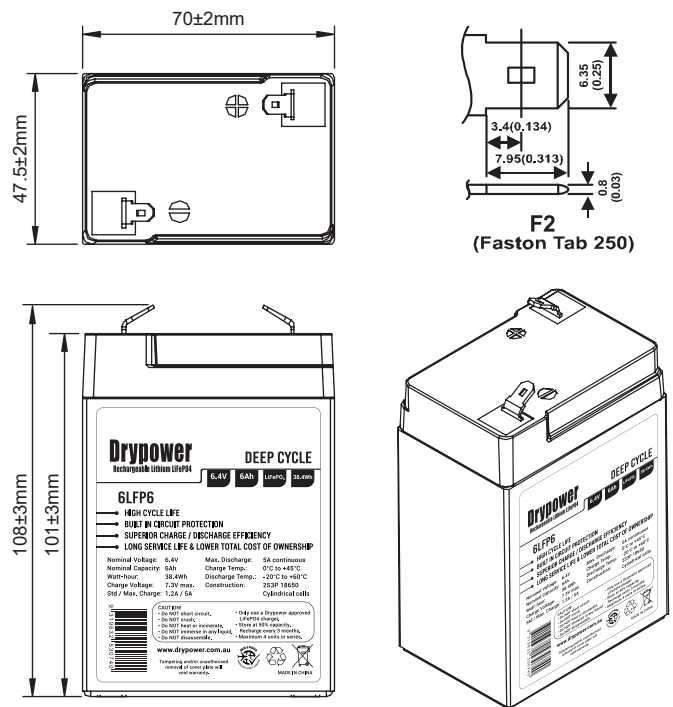

CHARACTERISTICS CHARTS

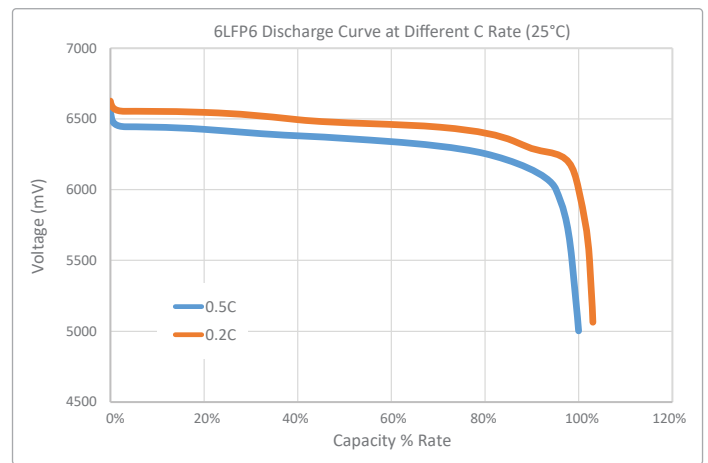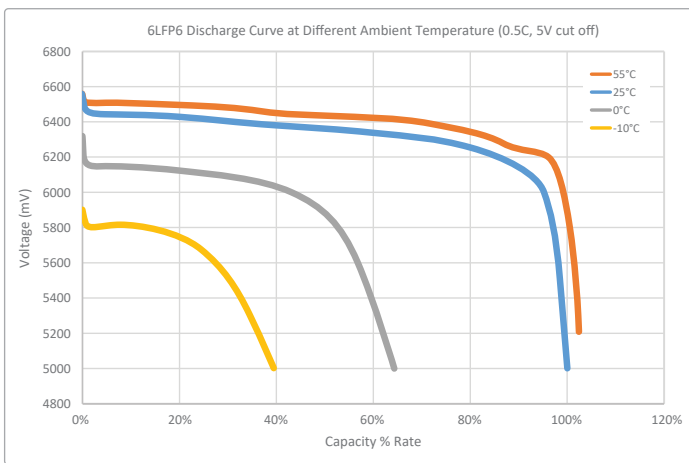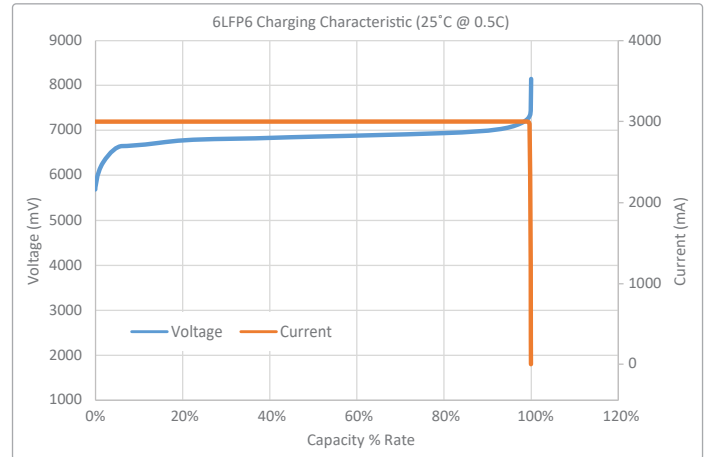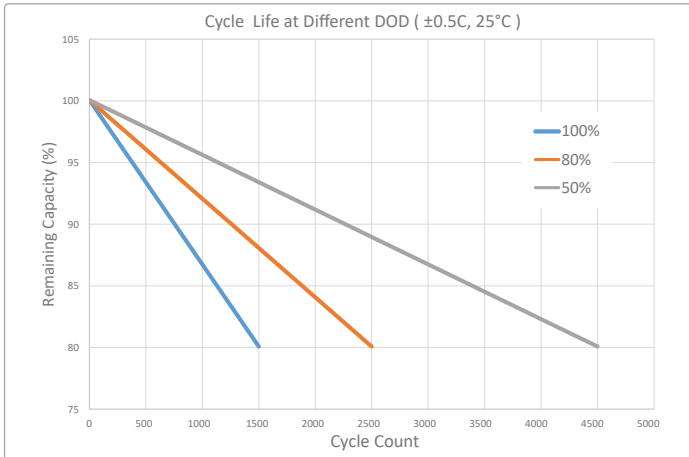

FEATURES & BENEFITS

- Long Service Life**
 >2000 cycles @100% DoD (25°C) to 80% of original capacity - longer service life than SLA to reduce maintenance costs.
- High Energy Density - More Power p/kg**
 Higher total system capacity and superior utilisation (full 100% DoD) to reduce overall system size and footprint.
- Robust Enclosure**
 Enclosed in IP5x (dust resistant) or IP6x (dust tight) case with closed loop terminals - suitable for harsh environments.
- Stable Chemistry & Built-in Circuit Protection**
 IEC & UN38.3 Safety Certified at cell level and integrated BMS protection to ensure safety and prevent damage.
- Lightweight**
 Approx. 1/2 the weight (or less) of equivalent in SLA means lower logistics costs and minimal OH&S concerns.
- Superior Charge & Discharge Efficiency**
 Faster charge/discharge rates (C/2 LiFePO4 vs C/20 SLA) for higher power usage and less downtime when charging.
- Wide Operating Temperature Tolerance**
 Suitable for use in a wider range of applications where ambient temperature is atypical: from -20°C up to +60°C.
- Fully Recyclable Battery**
 An environmentally friendly battery option, with no lead or calcium that can leak into the environment.

BUILT-IN PROTECTION

All Drypower Rechargeable Lithium batteries adhere to strict safety guidelines by incorporating Battery Management Systems (BMS) that include protection components such as:

- Integrated Circuit (IC)
- Thermistor
- MOSFET
- Protection Circuit Module (PCM)
- Fuse

The BMS in each Drypower battery helps to:

1. Maintain safety for users.
2. Prevent damage to equipment and property.
3. Eliminate concerns about use of the wrong type of charger.
4. Minimise the risk of overdischarge causing damage.
5. Provide short circuit and overcharge protection.

CAUTIONS

- Do NOT short circuit, crush or disassemble.
- Do NOT heat or incinerate.
- Do NOT immerse in any liquid.
- Do NOT allow the battery to become overdischarged. If possible, isolate the battery when not in use.
- Do NOT leave the battery in a discharged state. Always recharge after use with a Drypower approved LiFePO4 charger.
- Store at 50% capacity. Recharge every 3 months. The storage area should be clean, cool, dry and ventilated.
- Maximum 4 units in series. No parallel connection allowed.

Performance may vary depending on application. All specifications are correct at time of creation. All specifications and operation conditions contained in this datasheet are subject to change or improvement without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us • Aug2024